

06/21/00



A

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.G2608

First Named Inventor or Application Identifier

KOJI OKAMURA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 453. ☒ Drawing(s) (35 USC 113) Total Sheets 44. ☒ Oath or Declaration Total Pages 2

- a. ☒ Newly executed (original or copy)
b. ☐ Unexecuted for information purposes
c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ___/___

18. CORRESPONDENCE ADDRESS☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

+

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	54-20 =	34	X \$ 18.00 =	\$612.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	18-3 =	15	X \$ 78.00 =	\$1170.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
	BASIC FEE (37 CFR 1.16(a))				\$690.00
	Total of above Calculations =				\$2472.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$2472.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 2472.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Jack M. Arnold
SIGNATURE	<i>Jack M. Arnold Reg. No. 25,823</i>
DATE	June 20, 2000

TITLE OF THE INVENTION

IMAGE PROCESSING APPARATUS AND IMAGE PROCESSING METHOD

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to image processing apparatuses and image processing methods, and more particularly relates to an image processing apparatus and an image processing method suitable for a facsimile apparatus or the like including a recording unit using an ink-jet recording system.

Description of the Related Art

Recently, color facsimile communication has been standardized by the International Telecommunication Union-Telecommunication Standardization Sector (ITU-T), and facsimile apparatuses for compressing and communicating a color image in a Joint Photographic Experts Group (JPEG) compression system are well known. A recording unit in this type of facsimile apparatus is provided with a recorder using a laser beam system or using an ink jet system. In particular, facsimile apparatuses with a recording unit using the ink jet system capable of recording color images at low cost are widely disseminated.

Image recording apparatuses using laser systems, and particularly those using ink jet systems, have ink droplets of uniform size for recording a solid black portion when recording a thin line. The conventional image recording apparatuses are disadvantageous in that ink droplets of a size adequate for clearly recording the thin line are excessive for recording the solid black portion. Although it may depend on the quality of the paper or on the recording environment, an ink droplet for one dot tends to bleed in the paper, thus printing on an area larger than the target resolution of one dot. This problem is caused by characteristics of ink-jet recording, and the excessive ink noticeably accumulates in the black solid portion.

Due to the excessive amount of ink, an image, immediately after being printed, is output which is black and wet due to the ink. This may cause smearing which may spoil a next page, and the ink may soil a user. The excessive ink may also cause the paper to kink and crinkle. This causes waste not only of ink for recording but also of power consumption for recording.

Accordingly, there has been proposed an apparatus for decimating recording dots so as to conserve ink to be used and to reduce power consumption during recording, and to provide countermeasures against black-wetting and smearing. The user can set the apparatus to perform decimation, thus

reducing ink consumption and the operating cost.

Decimation includes two types of processing. One is unconditional decimation for unconditionally zigzag-converting black pixels into white pixels. The other is reference-conditional decimation, as disclosed in Japanese Laid-Open Patent No. 8-130637, for referring to states of pixels adjacent to a pixel to be decimated and for determining whether to decimate the pixel.

Hitherto, once the user has set the apparatus in a decimation recording mode, the apparatus always performs decimation regardless of the type of image to be recorded, whether it is a monochrome character image, a monochrome halftone image, or a color image.

The monochrome halftone image and the color image are images obtained by printing beautifully pictures and photographs. When a subject-copy image is read and converted into recording data, that is, binary data, halftoning, such as error diffusion processing, is performed.

For example, when multi-valued color image data obtained by reading a color subject copy is converted into a binary color image, color-difference data generated by peripheral conversion is added to the multi-valued color data. Subsequently, the added data is converted into a predetermined single color by comparison.

When the recording unit decimates and records the

processed recording data, gray scaling and overall color balance are lost, thus providing the user with an undesirable output image.

Since the monochrome halftone image is binarized by error diffusion processing, the image will lose gray scaling when decimated and the image quality becomes substantially degraded.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an image processing apparatus and an image processing method for solving or minimizing the problems described in the related art. Even when a second recording mode is selected for recording an image on a recording material at a recording density lower than a predetermined recording density, if the type of the image is determined and as a result the second recording mode is determined to be inappropriate, the recording mode is changed to a first recording mode for recording the image at the predetermined recording density. Therefore, decimation of a color image or a halftone image is prohibited, thus preventing the image quality from being degraded.

It is another object of the present invention to provide an image processing apparatus and an image processing method including a first recording mode for

performing unconditional decimation, a second recording mode for referring to images of pixels surrounding a pixel to be decimated and then performing decimation, and a third recording mode in which decimation is not performed. Even when the first or the second mode has been selected, the recording mode is changed to the third recording mode for color images. This prohibits decimation of the color image, thus preventing the quality of the color image from being degraded.

It is another object of the present invention to provide an image processing apparatus and an image processing method including a first recording mode for performing unconditional decimation, a second recording mode for referring to pixels surrounding a pixel to be decimated and then performing decimation, and a third recording mode for not performing decimation. Even when the first recording mode has been selected, the recording mode is changed to the second recording mode for monochrome halftone images. This reduces degradation of image quality caused by decimation.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The accompanying drawings, which are incorporated in,
and constitute a part of, the specification, illustrate
embodiments of the invention, and together with the
description, serve to explain the principles of the
invention.

10 Fig. 1 is a block diagram of the structure of a
facsimile apparatus according to an embodiment of the
present invention;

Fig. 2 is an illustration of details of the operation
unit 106 of Fig. 1;

15 Fig. 3 is a flowchart describing a recording process of
the embodiment; and

Fig. 4 is a flowchart describing a recording process of
another embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Preferred embodiments of the present invention will now
be described in detail in accordance with the accompanying
drawings.

Fig. 1 shows the structure of a facsimile apparatus
according to an embodiment of the present invention.

25 The facsimile apparatus is capable of performing normal

monochrome-mode copying and communication, color copying,
and color communication.

Referring to Fig. 1, a CPU 101 is a system controller
for controlling the overall facsimile apparatus.

5 A ROM 102 is a memory for storing a control program of
the CPU 101.

A RAM 103 includes, for example, a static random access
memory (SRAM), and stores program control variables and the
like. The RAM 103 functions as various work buffers for
10 buffering set values registered by a user and management
data of the apparatus.

An image memory 104 includes, for example, a dynamic
random access memory (DRAM), and stores image data of a
plurality of pages. The image memory 104 stores binary data,
15 obtained by converting multi-valued data obtained by reading
a subject-copy image, and binary data obtained by decoding
encoded data received from another communication apparatus.

An image processor 105 performs edge enhancement,
luminance-density conversion, and resolution conversion
20 including millimeter-inch conversion. In addition, the
image processor 105 performs image processing including
character binarization for converting multi-valued image
data obtained by reading a subject copy into binary data in
a character mode at a predetermined threshold, and halftone
25 binarization for converting multi-valued data obtained by

reading a subject copy into binary data in a halftone mode by means of error diffusion processing. The image processor 105 decimates binary data stored in the image memory 104 in accordance with a selection made by the user.

5 An operation unit 106 performs various inputting operations and includes a keyboard or the like.

 A recording control processor 107 converts binary data into a native command for recording.

10 A compression/decompression processor 108 performs encoding and decoding in systems including JPEG, modified Huffman (MF) coding, modified READ (MR) coding, and modified MR (MM) coding.

15 A PC interface 109 interfaces a host computer (PC) 120. A bidirectional interface 110 is formed by a Standard No. P1264 Bi-Centronics interface and performs bidirectional interfacing with the PC 120.

 A reading control unit 111 controls the quantity of light when reading a subject copy.

20 A sheet scanner 112 includes a CS image sensor, a copy feeder, and the like. The sheet scanner 112 optically reads an image on a subject copy and converts the image into electrical image data. In this embodiment, the sheet scanner 112 can read a color subject copy.

25 A line buffer 113 is employed when controlling transfer of image data.

A printer interface 114 analyzes a printer description language and converts the language into image data.

A printer 115 uses an ink jet system and includes a recording unit for recording an image obtained by reading a subject-copy image, a received image, or a file image from the PC. In this embodiment, the printer 115 is a color ink jet printer capable of recording a color image.

A communication unit 116 performs communication with other communication apparatuses. The communication unit 116 includes a modulator-demodulator (MODEM), a network control unit (NCU), and the like.

A timer 117 measures an operation interval and includes a clock IC and the like.

The facsimile apparatus further includes a Bi-Centronics interface cable 118 for connecting the bidirectional interface 110 and a host computer (PC) 120 and a public link 119.

Fig. 2 shows details of the operation unit 106 shown in Fig. 1.

Referring to Fig. 2, a numeric keypad 201 is employed for dialing phone numbers and for performing various settings. A liquid crystal display (LCD) 202 displays information for instructing operations and the like. A one-touch key 203 is used for dialing phone numbers and for performing various settings. A start key 204 starts copying,

communication, and the like. A mode key 205 switches
between a color mode and a monochrome mode. A key 206
switches the resolution. A hook key 207 acquires the link
119. A stop key 208 stops each process. In addition, the
5 operation unit 106 includes a redial/pause key 209, an
abbreviated dialing key 210, a key 211 for selecting a
reception mode, a copy mode key 212, and a function mode
key/lamp 213 for performing various settings. In this
embodiment, the function mode key 213 is used to select
10 between a normal mode for recording at a predetermined
density and a mode (decimation mode) for recording at a
recording density lower than the predetermined density. A
set key 214 confirms the processing when various settings
are determined. An error canceling key 215 performs
15 recovery processing when there is any error in the recording
unit. The operation unit 106 further includes an operation
display lamp 216 for displaying color operation or
monochrome operation and a status display lamp 217 for
displaying states of various errors.

20 Next, a process of recording by the facsimile apparatus
of the embodiment is described.

Fig. 3 is a flowchart describing the recording process
stored in the ROM 102 and performed by the CPU 101.

The process shown in Fig. 3 is performed assuming that
25 the image processor 105 shown in Fig. 1 includes one type of

decimation process. This decimation process unconditionally zigzag-converts black pixels in the entirety of an image to be decimated/recorded into white pixels, and records the image. The user employs the function mode key 213 of the operation unit 106 to select whether to perform decimation.

Referring to Fig. 3, the operation is described. In the following description, it is assumed that the user has selected a decimation mode.

In step S301, the process determines whether the recording process is a reception recording process based on a received image or a copy recording process in the copy mode. If the recording process is the reception recording process, the process determines in step S302 whether the received image is a color image or a monochrome image. The determination is performed based on a signal exchanged with another apparatus. If the received image is a monochrome image, the process sets the decimation mode in step S303. (This is because the user has selected the decimation mode.) If it is determined in step S302 that the received image is a color image, the process cancels the setting in step S303 even when the user has set the decimation mode, and changes the setting to a normal recording mode in step S304. This prevents the color image from being decimated, thus preventing the image quality from being degraded.

If it is determined in step S301 that the recording

process is the copy recording process in the copy mode, the process determines in step S305 whether an image to be recorded is a color image or a monochrome image. If the image is a color image, as in step S304, the process cancels the setting determined by the user and sets the normal recording mode in step S306, thus preventing the image quality from being degraded. If it is determined in step S305 that the image is a monochrome image, the process determines in step S307 whether the image to be recorded is a character image binarized in a character mode or a halftone image binarized in a halftoning mode. The determination is performed based on information obtained by binary processing performed by the apparatus. If it is determined in step S307 that the image is a character image, the process sets the decimation mode in step S308 based on the setting determined by the user. In contrast, if it is determined in step S307 that the image is a halftone image, the process cancels the setting determined by the user, and sets in step S309 the normal recording mode in which decimation is not performed.

In step S310, the process records the image in the set mode.

According to the embodiment, even when the decimation mode for recording at a recording density lower than the predetermined density is selected, if the decimation

recording mode is determined to be unsuitable as a result of determining the type of image, the recording mode is switched to the normal recording mode for recording at the predetermined density. This prohibits decimation recording of a color image or a halftone image, thus preventing the image quality of such an image from being degraded.

According to the embodiment shown in Fig. 3, decimation of the halftone image is prohibited exclusively in the copy mode by discriminating between the character image and the halftone image. For the received image, it is possible to discriminate between the character image and the halftone image. As disclosed in Japanese Patent Laid-Open No. 3-57083, the discrimination can be made based on dot arrangement of received binary data.

Specifically, by using this discrimination process, it is possible to discriminate between a character image and a halftone image in the received image and thereby prohibit decimation of the halftone image.

A recording process according to another embodiment is described hereinafter.

Fig. 4 is a flowchart describing the process stored in the ROM 102 and performed by the CPU 101.

The process shown in Fig. 4 is performed assuming that the image processor 105 shown in Fig. 1 includes two types of decimation process. One type is unconditional decimation

for unconditionally zigzag-converting black pixels into white pixels and thus recording. The other type is reference-conditional decimation for referring to images of pixels surrounding an input image and decimating the input image. The conditional decimation process, as disclosed in Japanese Patent Laid-Open No. 8-130637, determines states of pixels surrounding a black pixel to be decimated. If all the pixels surrounding the black pixel to be decimated are black, the central black pixel is converted to a white pixel.

The user employs the function mode key 213 of the operation unit 106 to select whether to perform decimation. When performing decimation, the user can select between unconditional decimation and conditional decimation.

Referring to Fig. 4, this recording process is described below.

In step S401, the process determines whether an image to be recorded is a color image or a monochrome image. If the image is a color image, the process proceeds to step S402. If the image is a monochrome image, the process proceeds to step S403. In step S402, the process cancels the selection and sets the normal recording mode in which decimation is not performed, even when the user has selected conditional or unconditional decimation. Accordingly, decimation of a color image is prohibited, thus preventing the color image from being degraded.

In step S403, the process determines whether the image to be recorded is a received image or a copy-mode image. If the image is a received image, the process proceeds to step S407. If the image is a copy-mode image, the process proceeds to step S404. In step S407, the process sets the mode set by the user.

In step S404, the process determines whether the image to be recorded is a character image binarized in a character mode or a halftone image binarized in a halftoning mode. This determination is made based on information obtained when the image has been binarized by the apparatus. If it is determined in step S404 that the image is a character image, the process sets the mode set by the user in step S407.

If it is determined in step S404 that the image is a halftone image, the process determines in step S405 whether unconditional decimation is selected. If the determination is negative, the process sets the mode set by the user in step S407.

If it is determined in step S405 that unconditional decimation is set, the process cancels the setting determined by the user since the quality of a monochrome halftone image is degraded when the image is decimated. The process sets conditional decimation, which does not involve degradation of the quality of a halftone image. An image

halftoned by error diffusion processing includes a number of isolated dots in a bright region. Since conditional decimation for exclusively decimating a black pixel when all the pixels surrounding the black pixel are black does not
5 decimate these isolated dots, the quality of the halftone image is not degraded. In the error diffusion processing, since a black solid portion insignificantly influenced by decimation is dense with dots, this portion is decimated.

10 In step S408, the process records the image in the set mode.

15 According to the above embodiment shown in Fig. 4, the process includes a first recording mode for performing unconditional decimation, a second recording mode for referring to pixels surrounding a pixel to be decimated and then decimating the pixel, and a third recording mode in which decimation is not performed. Even when the first or the second recording mode has been selected, if an image to be recorded is a color image, the recorded mode is changed to the third recording mode. This reduces degradation of
20 image quality caused by decimating the color image.

25 In addition, the process includes the first recording mode for performing unconditional decimation, the second recording mode for referring to pixels surrounding a pixel to be decimated and then decimating the pixel, and the third recording mode in which decimation is not performed. Even

when the first recording mode has been selected, if an image to be recorded is a monochrome halftone image, the recording mode is changed to the second recording mode. This reduces degradation of image quality caused by decimating the monochrome halftone image.

According to the embodiment shown in Fig. 4, the character image and the halftone image are discriminated between only in the copy mode, and the halftone image is conditionally decimated. Alternatively, it is possible to discriminate between character images and halftone images in the received image.

As disclosed in Japanese Laid-Open Patent No. 3-57083, this discrimination is made based on dot arrangement of received binary data.

Specifically, with this discrimination process, character images and halftone images are discriminated between in the received image, thus setting conditional decimation for the halftone image.

In Figs. 3 and 4, the type of image is determined in units of a page, and the recording mode is set in units of a page. Therefore, if recording images of a plurality of pages include a mixture of color images, monochrome images, character images, and halftone images, an appropriate recording mode can be set for each page.

While the present invention has been described with

reference to the preferred embodiments, it is to be understood that the invention is not limited to these embodiments and includes various modifications. Although the present invention has been described in the context of a facsimile apparatus by way of example, the present invention is also applicable to a copy machine or to a printer. The recording unit employed in the above embodiments is not limited to that used in the ink jet system, and may be used in the laser system.

The present invention is applicable to a system including a plurality of devices, such as a host computer, an interface device, a reader, and a printer.

The present invention is applicable to a storage medium for storing a program code of software executing the functions of the above embodiments. By providing a system or an apparatus with the storage medium, a computer (alternatively, a CPU or an MPU) of the system or the apparatus can read the program code stored in the storage medium, thus executing the functions.

In this case, since the functions of the above embodiments are executed by the program code read from the storage medium, the present invention is formed by the storage medium storing the program code.

The storage medium for providing the program code includes, for example, a floppy disk, a hard disk, an

optical disk, a magneto-optical disk, a CD-ROM, a CD-R, a magnetic tape, a non-volatile memory card, or a ROM.

By executing the program code read by the computer, the functions of the above embodiments are executed. Of course, the functions can be executed by an operating system running on the computer or the like which performs part or all of the actual processing based on instructions of the program code.

In addition, the program code read from the storage medium can be written in an add-in board inserted in the computer or in an add-in unit connected to the computer. Subsequently, a CPU or the like included in the add-in board or the add-in unit can perform part or all of the actual processing, thus performing the functions of the above embodiments.

As described above, according to the present invention, even when a decimation recording mode is selected for recording an image on a recording material at a recording density lower than a predetermined recording density, if it is determined that the decimation recording mode is not appropriate as a result of determining the type of the image, the recording mode is changed to a normal recording mode for recording an image at the predetermined recording density. This prohibits decimation of a color image or a halftone image, thus preventing the image quality from being degraded.

According to the present invention, there are a first recording mode for performing unconditional decimation, a second recording mode for referring to pixels surrounding a pixel to be decimated and then performing decimation, and a third recording mode for not performing decimation. For a monochrome halftone image, the recording mode is changed to the second recording mode even when the first recording mode has been selected, thus preventing the image quality from being degraded by decimation of the monochrome halftone image.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments herein except as claimed in the appended claims.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:
input means for inputting an image of one of a plurality of image types;
selecting means for selecting a recording mode from among a first recording mode for recording the image on a recording material at a predetermined recording density, and a second recording mode for recording the image on the recording material at a recording density lower than that of the first recording mode;
determining means for determining if the input image is a predetermined image type; and
control means for changing to the first recording mode, when the second recording mode is selected by said selecting means and said determining means determines that the input image is the predetermined image type.
2. An image processing apparatus according to Claim 1, further comprising a recording means for recording the image in one of the first recording mode and the second recording mode.
3. An image processing apparatus according to Claim 1, wherein said input means inputs one-pixel binary image data.

4. An image processing apparatus according to Claim 1, wherein the second recording mode is for decimating and recording the input image.

5. An image processing apparatus according to Claim 3, wherein said input means inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

6. An image processing apparatus according to Claim 1, wherein the predetermined image type is a color image, and said determining means determines whether the input image is one of a monochrome image and a color image; and

said control means changes to the first recording mode, when the second recording mode is selected by said selecting means, and said determining means determines that the input image is a color image.

7. An image processing apparatus according to Claim 1, wherein when the input image type is a monochrome image, and said determining means determines whether the monochrome image is one of a character image and a halftone image; and

said control means changes to the first recording mode,

001220-10230660

8. An image processing apparatus according to Claim 1, wherein said input means inputs an image having a plurality of pages;

said control means controls the recording mode in units of a page.

selecting means for selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said input means and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said input means, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said input means on the recording material without decimating the image;

determining means for determining if the input image is

a predetermined image type; and

control means for changing to the third recording mode, when one of the first and second recording modes is selected by said selecting means, and said determining means determines that the input image is the predetermined image type.

10. An image processing apparatus according to Claim 9, further comprising a recording means for recording the image in one of the first, second, and third recording modes.

11. An image processing apparatus according to Claim 9, wherein said input means inputs one-pixel binary image data.

12. An image processing apparatus according to Claim 11, wherein said input means inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

13. An image processing apparatus according to Claim 9, wherein the predetermined image type is a color image, and said determining means determines whether the input image is one of a monochrome image and a color image; and

said control means changes to the third recording mode,

14. An image processing apparatus according to Claim 9,
wherein said input means inputs an image having a plurality
of pages;

said control means controls the recording mode in units of a page.

selecting means for selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said input means and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said input means, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said input means on the recording material without decimating the image;

determining means for determining the image type of the

input image; and

control means for changing the recording mode selected by said selecting means in accordance with a determination result by said determining means;

wherein said determining means determines whether the input image is one of a monochrome image and a color image, and if a monochrome image, whether the monochrome image is one of a character image and a halftone image; and

said control means changes to the second recording mode, when the first recording mode is selected by said selecting means, and said determining means determines that the monochrome image is a halftone image.

16. An image processing method comprising:

an inputting step of inputting an image of one of a plurality of image types;

a selecting step of selecting a recording mode from among a first recording mode for recording the image on a recording material at a predetermined recording density, and a second recording mode for recording the image on the recording material at a recording density lower than that of the first recording mode;

a determining step of determining if the input image is a predetermined image type; and

a controlling step of changing to the first recording

mode, when the second recording mode is selected by said selecting step, and said determining step determines that the input image is the predetermined image type.

17. An image processing method according to Claim 16, further comprising a recording step of recording the image in one of the first and second recording modes.

18. An image processing method according to Claim 16, wherein said inputting step inputs one-pixel binary image data.

19. An image processing method according to Claim 16, wherein the second recording mode is for decimating and recording the input image.

20. An image processing method according to Claim 18, wherein said inputting step inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

21. An image processing method according to Claim 16, wherein the predetermined image type is a color image, and said determining step determines whether the input image is

said controlling step changes to the first recording mode, when the second recording mode is selected by said selecting step, and said determining step determines that the input image type is a color image.

said controlling step changes to the first recording mode, when the second recording mode is selected by said selecting step, and said determining step determines that the monochrome image is a halftone image.

said determining step determines the image type of the input image in units of a page; and

24. An image processing method comprising:

an inputting step of inputting an image of one of a

plurality of image types;

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step without decimating the image;

a determining step of determining if the image is a predetermined image type; and

a controlling step of changing to the third recording mode, when one of the first and second recording modes is selected by said selecting step, and said determining step determines that the input image is the predetermined image type.

25. An image processing method according to Claim 24, further comprising a recording step of recording the image in one of the first, second, and third recording modes.

26. An image processing method according to Claim 24, wherein said inputting step inputs one-pixel binary image data.

27. An image processing method according to Claim 26, wherein said inputting step inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

28. An image processing method according to Claim 24, wherein the predetermined image type is a color image, and said determining step determines whether the input image is one of a monochrome image and a color image; and

said controlling step changes to the third recording mode, when one of the first and second recording modes is selected by said selecting step, and said determining step determines that the input image is a color image.

29. An image processing method according to Claim 24, wherein said inputting step inputs an image having a plurality of pages;

said determining step determines the image type of the input image in units of a page; and

said controlling step controls the recording mode in units of a page.

30. An image processing method comprising:

said controlling step changes to the second recording mode, when the first recording mode is selected by said selecting step, and said determining step determines that the monochrome image is a halftone image.

31. A computer readable medium having recorded thereon codes for implementing a computer implementable image processing method comprising:

an inputting step of inputting an image of one of a plurality of image types;

a selecting step of selecting a recording mode from among a first recording mode for recording the image on a recording material at a predetermined recording density, and a second recording mode for recording the image on the recording material at a recording density lower than that of the first recording mode;

a determining step of determining if the input image is a predetermined image type; and

a controlling step of changing to the first recording mode, when the second recording mode is selected by said selecting step, and said determining step determines that the input image is the predetermined image type.

32. A computer readable medium according to Claim 31, further comprising a recording step of recording the image in one of the first and second modes.

33. A computer readable medium according to Claim 31, wherein said inputting step inputs one-pixel binary image data.

0059201-052100

35. A computer readable medium according to Claim 33, wherein said inputting step inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

said controlling step changes to the first recording mode, when the second recording mode is selected by said selecting step, and said determining step determines that the input image type is a color image.

said controlling step changes to the first recording

mode, when the second recording mode is selected by said selecting step, and said determining step determines that the monochrome image is a halftone image.

38. A computer readable medium according to Claim 31, wherein said inputting step inputs an image having a plurality of pages;

said determining step determines the image type of the input image in units of a page; and

said controlling step controls the recording mode in units of a page.

39. A computer readable medium having recorded thereon codes for implementing a computer implementable image processing method comprising:

an inputting step of inputting an image of one of a plurality of image types;

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step without

00000001-00000000

decimating the image;

a determining step of determining if the image is a predetermined image type; and

a controlling step of changing to the third recording mode, when one of the first and second recording modes is selected by said selecting step, and said determining step determines that the input image is the predetermined image type.

40. A computer readable medium according to Claim 39, further comprising a recording step of recording the image in one of the first, second, and third recording modes.

41. A computer readable medium according to Claim 39, wherein said inputting step inputs one-pixel binary image data.

42. A computer readable medium according to Claim 39,, wherein said inputting step inputs one of binary data received from another communication apparatus and binary data obtained by binarizing multi-valued image data obtained by reading a subject copy.

43. A computer readable medium according to Claim 39, wherein the predetermined image type is a color image, and

said controlling step changes to the third recording mode, when one of the first and second recording modes is selected by said selecting step, and said determining step determines that the input image is a color image.

said determining step determines the image type of the input image in units of a page; and

45. A computer readable medium having recorded thereon codes for implementing a computer implementable image processing method comprising:

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by

said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step on the recording material without decimating the image;

a determining step of determining the image type of the input image; and

a controlling step of changing the recording mode selected by said selecting step in accordance with a determination result by said determining step;

wherein said determining step determines whether the input image is one of a monochrome image and a color image, and if a monochrome image, whether the monochrome image is one of a character image and a halftone image; and

said controlling step changes to the second recording mode, when the first recording mode is selected by said selecting step, and said determining step determines that the monochrome image is a halftone image.

46. An image processing apparatus comprising:

input means for inputting an image of one of a color image and a monochrome image;

selecting means for selecting a recording mode from among a normal recording mode for recording the image on a recording material at a predetermined recording density, and a decimation recording mode for recording the image on the

determining means for determining if the input image is a color image or a monochrome image; and

control means for changing to the normal recording mode, when the decimation recording mode is selected by said selecting means and said determining means determines that the input image is a color image.

47. An image processing apparatus comprising:

input means for inputting an image of one of a color image and a monochrome image;

selecting means for selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said input means and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said input means, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said input means on the recording material without decimating the image;

determining means for determining if the input image is a color image or a monochrome image; and

control means for changing to the third recording mode,
when one of the first and second recording modes is selected

by said selecting means, and said determining means determines that the input image is a color image.

48. An image processing apparatus comprising:

input means for inputting an image of one of a color image and a monochrome image;

selecting means for selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step on the recording material without decimating the image;

determining means for determining whether the input image is one of a monochrome image and a color image, and if a monochrome image, whether the monochrome image is one of a character image and a halftone image; and

control means for changing to the second recording mode, when the first recording mode is selected by said selecting means, and said determining step determines that the monochrome image is a halftone image.

49. An image processing method comprising:

a selecting step of selecting a recording mode from among a normal recording mode for recording the image on a recording material at a predetermined recording density, and a decimation recording mode for recording the image on the recording material at a recording density lower than that of the normal recording mode;

a controlling step of changing to the normal recording mode, when the decimation recording mode is selected by said selecting means and said determining means determines that the input image is a color image.

an inputting step of inputting an image of one of a color image and a monochrome image;

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said input means and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said input means, decimating the image, and recording the image on the recording material, and a third recording mode

for recording the image input by said input means on the recording material without decimating the image;

a determining step of determining if the input image is a color image or a monochrome image; and

a controlling step of changing to the third recording mode, when one of the first and second recording modes is selected by said selecting means, and said determining means determines that the input image is a color image.

51. An image processing method comprising:

an inputting step of inputting an image of one of a color image and a monochrome image;

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step on the recording material without decimating the image;

a determining step of determining whether the input image is one of a monochrome image and a color image, and if a monochrome image, whether the monochrome image is one of a character image and a halftone image; and

00000001.000100

52. A computer readable medium having recorded thereon codes for implementing a computer implementable image processing method comprising:

a selecting step of selecting a recording mode from among a normal recording mode for recording the image on a recording material at a predetermined recording density, and a decimation recording mode for recording the image on the recording material at a recording density lower than that of the normal recording mode;

a controlling step of changing to the normal recording mode, when the decimation recording mode is selected by said selecting means and said determining means determines that the input image is a color image.

53. A computer readable medium having recorded thereon codes for implementing a computer implementable image

processing method comprising:

an inputting step of inputting an image of one of a color image and a monochrome image;

a selecting step of selecting a recording mode from among a first recording mode for unconditionally decimating the image input by said input means and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said input means, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said input means on the recording material without decimating the image;

a determining step of determining if the input image is a color image or a monochrome image; and

a controlling step of changing to the third recording mode, when one of the first and second recording modes is selected by said selecting means, and said determining means determines that the input image is a color image.

54. A computer readable medium having recorded thereon codes for implementing a computer implementable image processing method comprising:

an inputting step of inputting an image of one of a color image and a monochrome image;

a selecting step of selecting a recording mode from

among a first recording mode for unconditionally decimating the image input by said inputting step and recording the image on a recording material, a second recording mode for referring to images of pixels surrounding the image input by said inputting step, decimating the image, and recording the image on the recording material, and a third recording mode for recording the image input by said inputting step on the recording material without decimating the image;

a determining step of determining whether the input image is one of a monochrome image and a color image, and if a monochrome image, whether the monochrome image is one of a character image and a halftone image; and

a controlling step of changing to the second recording mode, when the first recording mode is selected by said selecting means, and said determining step determines that the monochrome image is a halftone image.

00000001 000100

ABSTRACT OF THE DISCLOSURE

An image processing system includes an input unit, a selecting unit, a determining unit and a control unit. The input unit inputs one of a color image and a monochrome image, and the selecting unit selects either a normal recording mode for recording an image on a recording material at a predetermined recording density, and a decimation recording mode for recording the image on the recording material at a recording density lower than that of the normal recording mode. The determining unit determines if the input image is a color image or a monochrome image, and the control unit changes to the normal recording mode, when the decimation recording mode is selected and the input image is determined to be a color image.

001290-1022560

FIG. 1

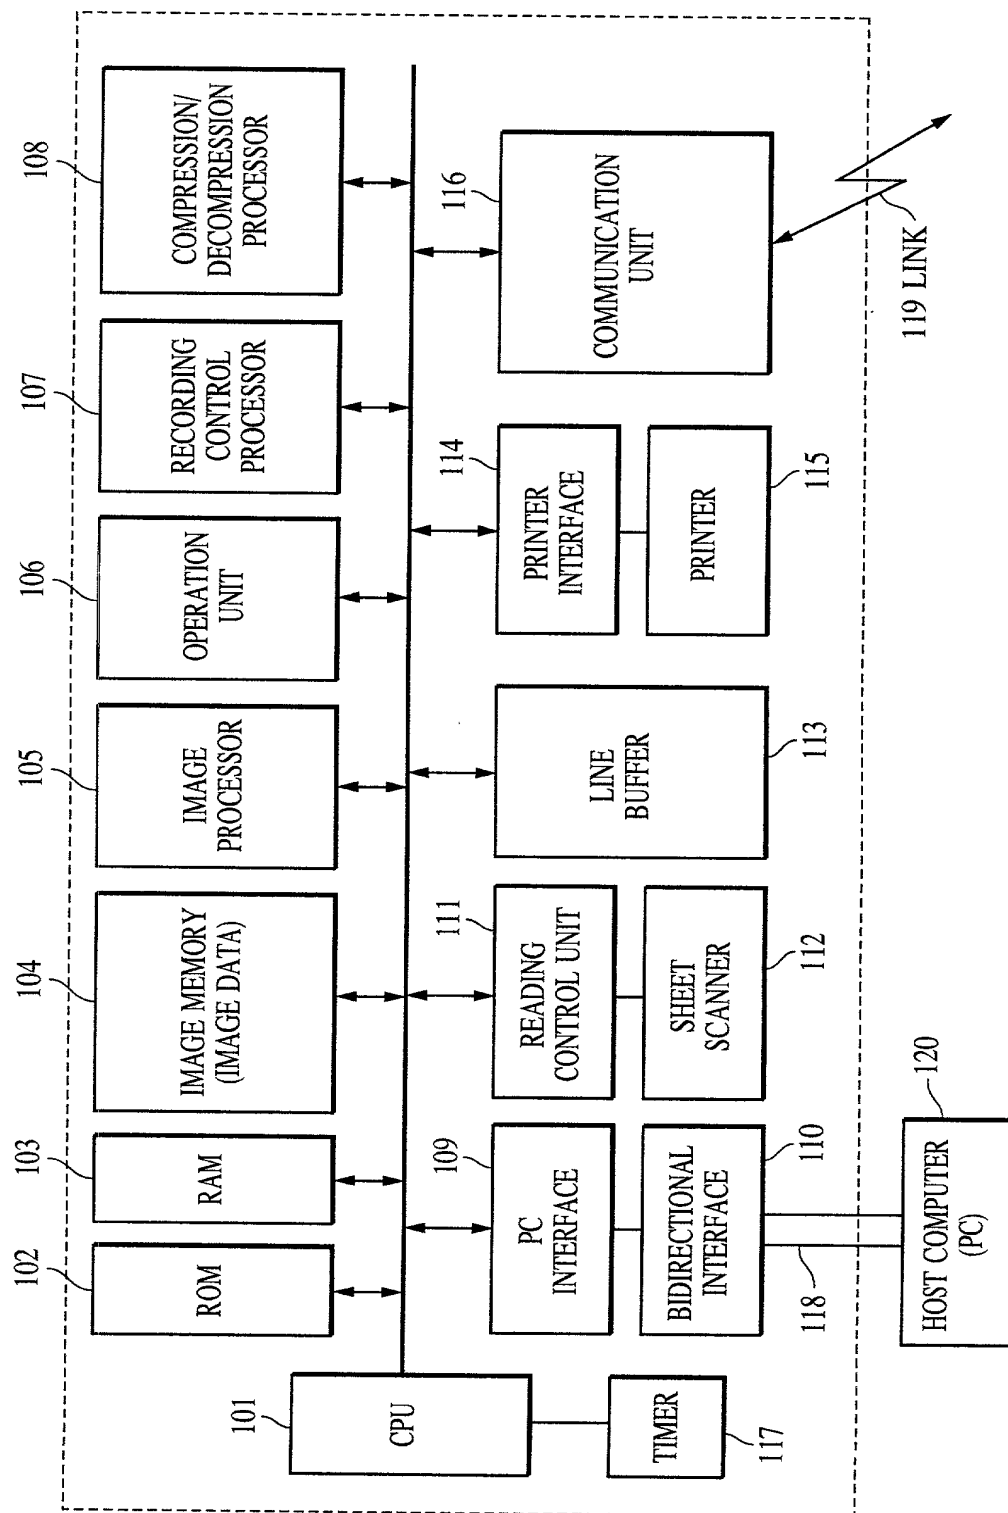


FIG. 2

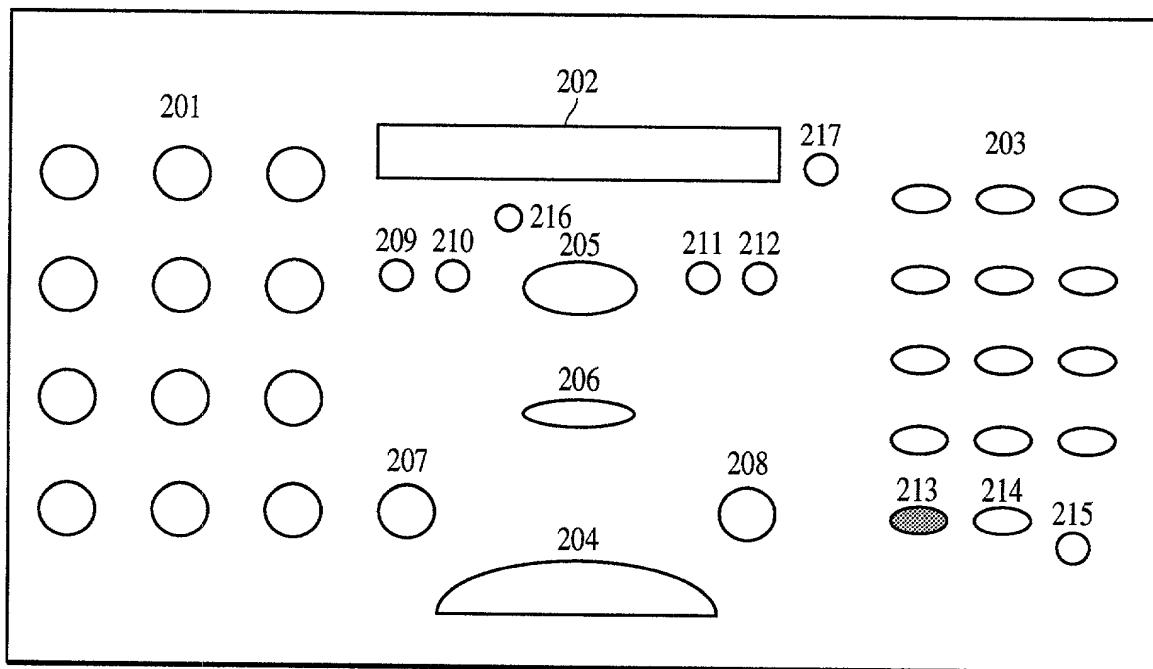


FIG. 3


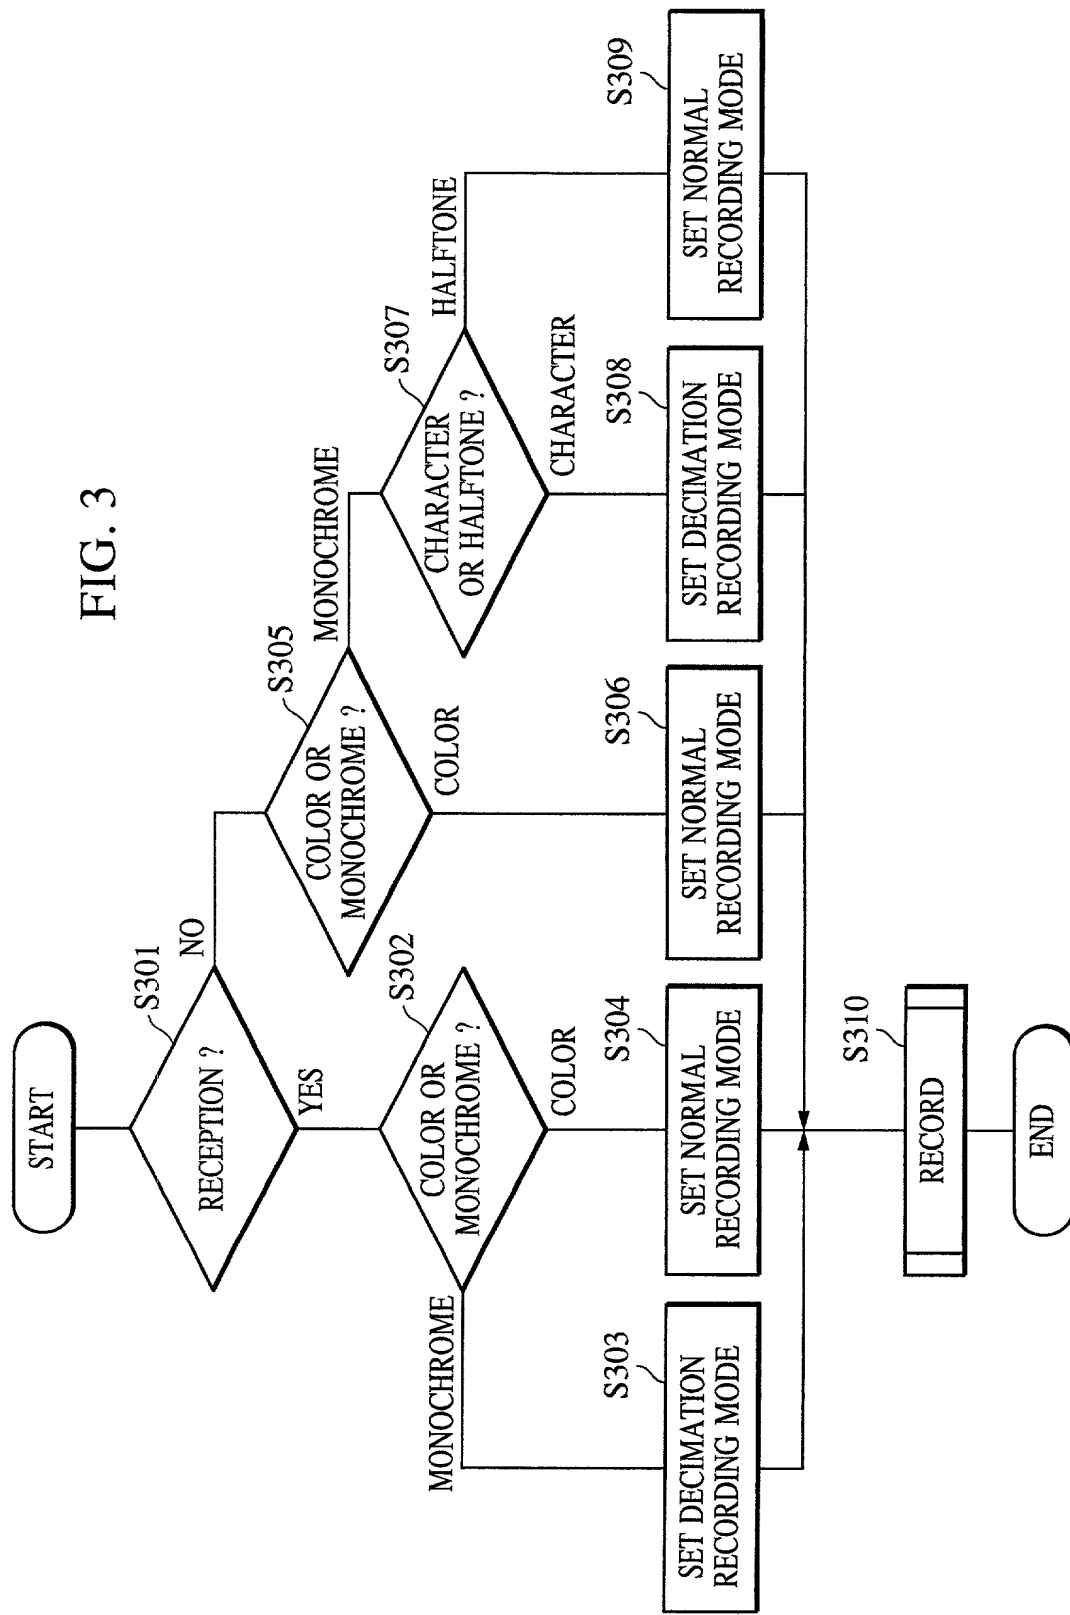


FIG. 4

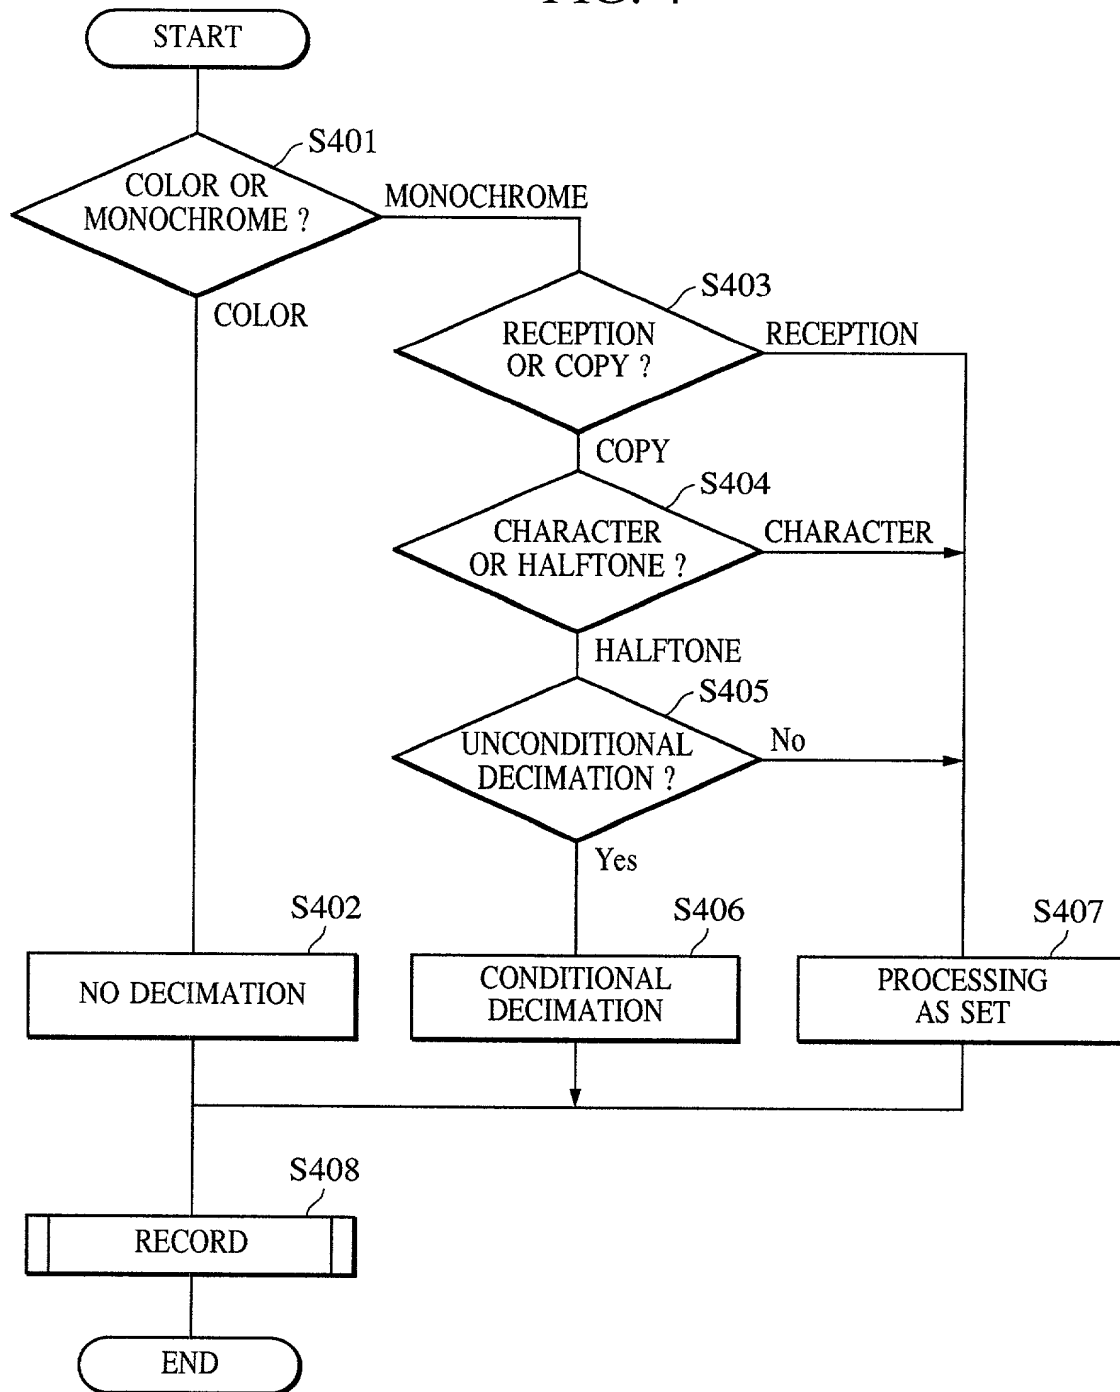

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PROCESSING APPARATUS AND IMAGE PROCESSING METHOD the specification of which ☒ is attached hereto. ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day / Mo. / Yr.)	(Yes / No) Priority Claimed
Japan	180001/1999 (Pat.)	25/June/1999	Yes

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Koji Okamura
 Inventor's signature Koji Okamura
 Date June 8, 2000 Citizen/Subject of Japan
 Residence 1101-1-1-410, Nonoi, Ohaza, Toride-shi, Ibaraki-ken, Japan
 Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

001230-05514

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(page 2)

Full Name of Second Joint Inventor Naoya WatanabeInventor's signature Naoya WatanabeDate June 8, 2000 Citizen/Subject of JapanResidence 4-10-D-102, Aoyamada, Abiko-shi, Chiba-ken, JapanPost Office Address c/o CANON KABUSHIKI KAISHA3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor _____

Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Fourth Joint Inventor _____

Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Fifth Joint Inventor _____

Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

Full Name of Sixth Joint Inventor _____

Inventor's signature _____

Date _____ Citizen/Subject of _____

Residence _____

Post Office Address _____

001250-10225000